


NOTES:

1. METERED CONTROLLER ENCLOSURE (PER LEGEND).
2. UL-APPROVED METER SOCKET WITH TEST BLOCKS.
3. UL-APPROVED LOAD CENTER.
4. ELECTRICAL CONDUIT (NOT SUPPLIED) FOR 120V. LINE FEED INTO METER, PER ELECTRIC SERVICE PLANS AND/OR SPECIFICATIONS.
5. AUTOMATIC IRRIGATION CONTROLLER.
6. 120V. ON/OFF SWITCH AND 2-OUTLET GFCI RECEPTACLE.
7. TERMINAL STRIP FOR LOW-VOLTAGE WIRES.
8. MIN. ONE 2" DIA. PVC CONDUIT PER 24 WIRES; USE LONG SWEEP ELL'S.
9. DIRECT BURIAL CONTROL WIRES TO 24V. IRRIGATION VALVES.
10. 5/8" DIA. x 8' GROUNDING ROD w/ #10 GROUND WIRE AND CLAMP.
11. POURED CONCRETE BASE - 9" MIN. THICKNESS - EXTEND 8" BEYOND OUTSIDE DIMENSIONS OF ENCLOSURE WITH 2% SLOPE FOR DRAINAGE.
12. SECURE CONTROLLER ENCLOSURE TO CONG. BASE PER MFR. SPEC.
13. FINISH GRADE.

SIDE VIEW

FRONT VIEW

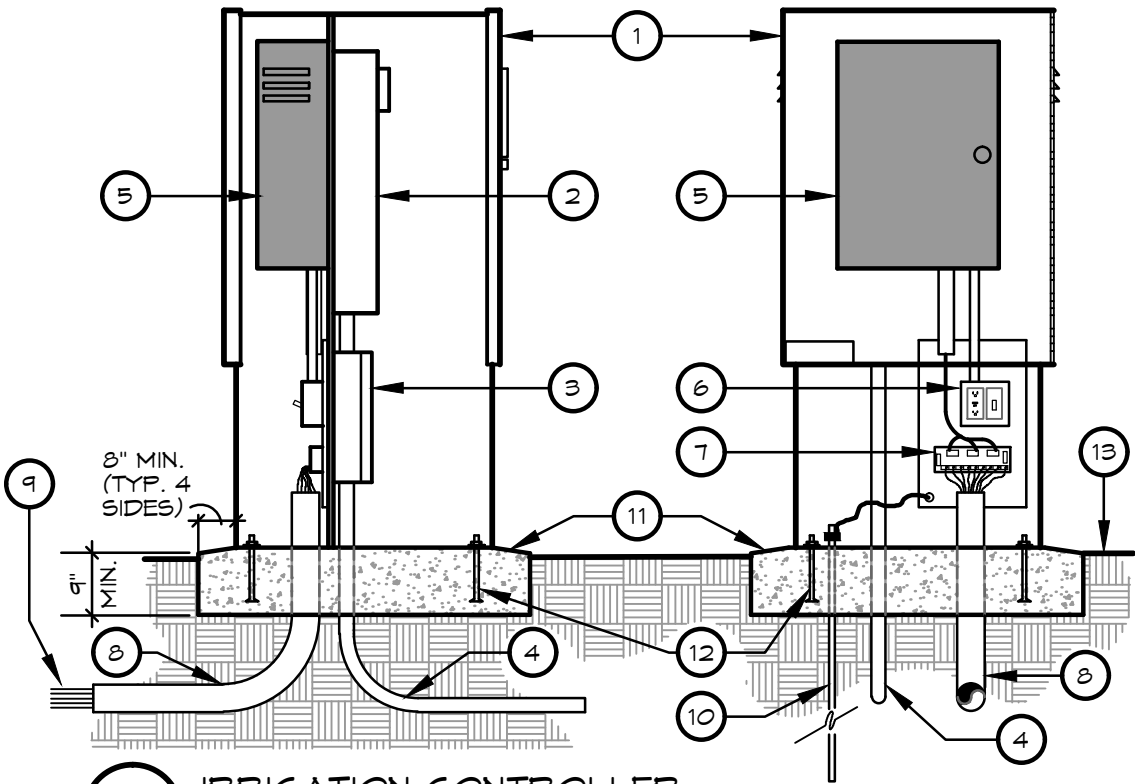

B-13

IRRIGATION CONTROLLER
(IN A METERED ENCLOSURE)